

REPORT

3933 US ROUTE 11 CORTLAND, NEW YORK 13045

Order No. 105030300 Date: August 28, 2022

REPORT NO. 105030300CRT-005e

IMPACT SOUND TRANSMISSION TEST ON
TEST NUMBER #289066 ID: LIONS FLOOR NATURAL ESSENCE PLUS
COLLECTION OVER A SIX INCH CONCRETE SLAB WITH A DROP CEILING

RENDERED TO

LIONS FLOOR

INTRODUCTION

This report gives the result of an Impact Sound Transmission test on flooring. The sample was selected and supplied by the client and received at the laboratories on August 2, 2022. The material appeared to be in new, unused condition upon arrival.

AUTHORIZATION

Signed Intertek Quotation No. Qu-01259122-0

TEST METHOD

The floor system was tested in general accordance with the American Society for Testing and Materials designation ASTM E492-09 (Reapproved 2016), "Standard Test Method for Laboratory Measurement of Impact Sound Transmission through Floor-Ceiling Assemblies Using the Tapping Machine". It was classified in accordance with ASTM E989-21, entitled, "Standard Classification for Determination of Single-Number Metrics for Impact Noise".



GENERAL

The test method is designed to measure the impact sound transmission performance of a floor-ceiling assembly, in a controlled laboratory environment. A standard tapping machine (Bruel & Kjaer Type 3207) was placed at four positions on the test floor that forms the horizontal separation between two rooms, one directly above the other. The data obtained was normalized to a reference room absorption of 10 square meters in accordance with the test method.

The standard also prescribes a single-figure classification rating called "Impact Insulation Class, IIC" which can be used by architects, builders and code authorities for acoustical design purposes in building construction.

The IIC is obtained by matching a standard reference contour to the plotted normalized one-third octave band sound pressure levels at each test frequency. The greater the IIC rating, the lower the impact sound transmission through the floor-ceiling assembly.

DESCRIPTION OF THE FLOOR/CEILING ASSEMBLY

The floor/ceiling assembly system consisted of a 6 inch thick concrete floor with a drop ceiling below forming the horizontal separation between two rooms, one directly above the other. The drop ceiling consisted of 14 inch deep steel bar joists spaced 38 inches on center. The ceiling construction consisted of 2 x 4 inch wood bolted to the bar joists. The 2 x 4 inch wood was spaced 24 inches on center. Resilient channels (1/2 inch single leaf) were positioned on 16 inch centers between the furring strips and the 1/2 inch gypsum board. Sound attenuation batts (U.S.G. Thermofiber), four (4) inches in thickness were placed between the joists in the formed cavity. The receiving room below measured 1440 cubic feet.

DESCRIPTION OF TEST SPECIMEN

The test specimen consisted of Test Number: #289066 ID: Lions Floor Natural Essence Plus Collection. The locking flooring planks with resilient backing measured 9.00 inches wide by 60 inches long by 0.25 inches thick. The flooring weighed 2.20 lbs./ft².





RESULTS OF TEST

1/3 Octave Band

The data obtained in the room below the panel normalized to A_0 = 10 square meters, is as follows:

TEST NUMBER #289066 ID: LIONS FLOOR NATURAL ESSENCE PLUS COLLECTION

Center	
Frequency	1/3 Octave Band Sound Pressure
Hertz	Level dB re 0.0002 Microbar
<u> </u>	
100	61
125	57
160	54
200	54
250	54
315	54
400	52
500	50
630	48
800	44
1000	41
1250	35
1600	32
2000	26
2500	23
3150	19
Impact	59
Insulation Class	
(IIC)	


<u>PRECISION</u>

The 95% uncertainty level for each tapping machine location is less than 3 dB for the 1/3 octave bands centered in the range from 100 to 400 Hz and less than 2.5 dB for the bands centered in the range from 500 to 3150 Hz.


For the floor/ceiling construction, the 95% uncertainty limits ($\triangle L_n$) for the normalized sound pressure levels were determined to be less than 2 dB for the 1/3 octave bands centered in the range from 100 to 3150 Hz.



TEST NUMBER TEST NUMBER #289066 ID: LIONS FLOOR NATURAL ESSENCE PLUS COLLECTION OVER A SIX INCH CONCRETE SLAB WITH A DROP CEILING

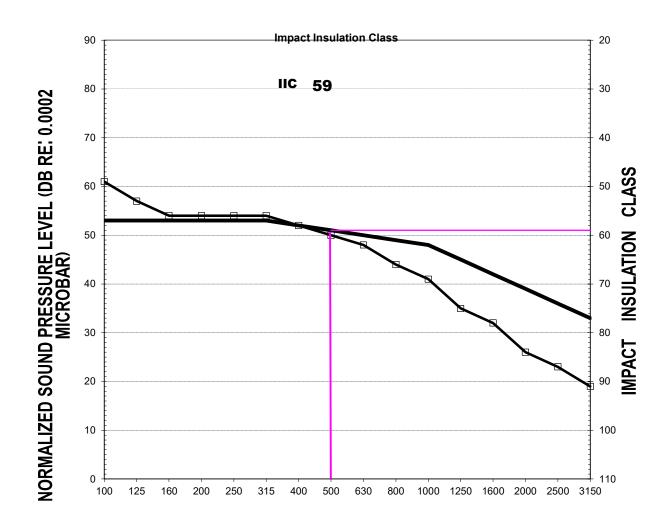

One-Third Octave Band Center Frequency (Hz)



LIONS FLOOR



REMARKS

1. Ambient Temperature: 73°F

2. Relative Humidity: 61%

CONCLUSION

The test method employed for this test has no pass-fail criteria; therefore, the evaluation of the test results is left to the discretion of the client.

Date of Test: August 17, 2022

Report Approved by:

had A Markey

Chad A. Morey **Technical Analyst**

Acoustical Testing

Attachments: None

Report Reviewed By:

Brian Cyr Engineer

Driver Cy

Acoustical Testing