



# Lone Star Spirit XL

## SPC COLLECTION



LI-TS208 Ballroom Rodeo

Lone Star Spirit XL boasts versatile and refined exotic wood-like designs with the latest Embossed in Register (EIR) technology and extra length profile measuring 6 feet long and 9 inches wide with 1/2 inch thickness. The collection is also water resistant, scratch-resistant, antibacterial-cured, easy to install, low-maintenance, eco-friendly, durable, and long-lasting, making it perfect for both budget-conscious DIYers and luxury-minded homeowners.



Water Resistant



Indent Resistant



Paw Friendly



Sound Tested



CERTIFIED BY  
SCS Global Services

# Lone Star Spirit XL


## SPC COLLECTION

### Specifications


<b>Material Type</b>	SPC
<b>Plank Size</b>	6' x 9"
<b>Total Thickness</b>	6.5 mm
<b>Core Thickness</b>	5 mm
<b>Wear Layer</b>	20 mil
<b>Attached Pad</b>	Yes
<b>Pad Thickness</b>	1.5 mm
<b>Pad Type</b>	Anti Bacterial & Acoustic
<b>Edge Profile</b>	Painted Bevel
<b>Installation Type</b>	Uniclic
<b>Plank Repeat</b>	8-10
<b>Texture/Style</b>	Embossed in Register (EIR)
<b>Box Size</b>	22.65 sq. ft.
<b>Pieces/Box</b>	5 pieces
<b>Lbs./Box</b>	50 lbs.
<b>Pallet Size</b>	40 boxes
<b>Container Size</b>	960 boxes



### Colors

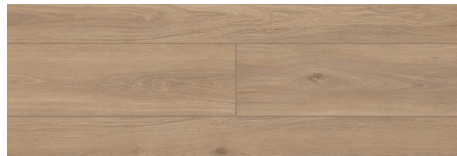

LI-TS201 Artisan Touch

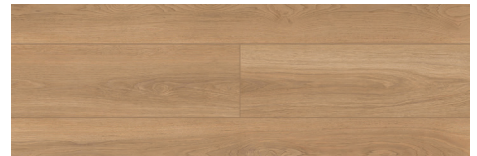

LI-TS202 Backyard Garnish



LI-TS203 Oak Exotica



LI-TS204 Oak Dry-Aged



LI-TS205 Forgotten Bark



LI-TS206 Shangri La



LI-TS207 Sea Shell




LI-TS208 Ballroom Rodeo

### Moldings

Seamlessly blend together our high-performing flooring products with the desired trim to create the desired aesthetic.

Our moldings coordinate with all our collections and respected colors.



**End Cap**

35 mm x 10 mm  
(1.378" x .394")



**Flush Stair Nose**

110.4 mm x 5.1 mm  
(4.346" x .201")



**Quarter Round**

25.4 mm x 15.2 mm  
(1.77" x .598")



**Reducer**

25.4 mm x 15.2 mm  
(1.77" x .598")



**T-Molding**

45.4 mm x 3.9 mm  
(1.787" x .154")

### Testing

Fire Rating	ASTM E648	Class 1	Average Wear Layer Thickness	ASTM F410	20.7 mil
Coefficient of Friction	ASTM D2047	Standard Neolite 0.93	Dimensional Stability, Curl After Heat	ASTM F2199	Passes
Static Load Limit	ASTM F970	0.004 in.	Residual Indentation, Surface Integrity	ASTM F1914	Passes
IIC - Impact Sound Rating	E492	61 db	Resistance to Heat	ASTM F1514	Passes
STC - Sound Transmission Loss	E90	53 db	Resistance to Light	ASTM F1515	Passes
Overall Thickness	ASTM F387	0.265 in.	<b>Floor Score Certified   Phthalate Free</b>		