

TEST REPORT

DATE: 11-15-2022 Page 1 of 1 TEST NUMBER: 0291613

CLIENT Lions Floor

TEST METHOD CONDUCTED

ASTM F410 Standard Test Method for Wear Layer Thickness of Resilient Floor Coverings by Optical Measurement



DESCRIPTION OF TEST SAMPLE		
IDENTIFICATION	Lions Floor - Trenta Collection	
COLOR	Bliss LI-SP02	
CONSTRUCTION	SPC	
BACKING	EVA	


GENERAL PRINCIPLE

The thickness of the wear layer of resilient non-textile floor coverings is determined by microscopic optical measurement. The specimen is examined in five areas and measurements are made on the outer most layer of the composite material. The measurements are recorded to the .0001 inch and averaged.

TEST RESULTS

	THICKNESS	
SPECIMEN 1	0.0253 inch	
SPECIMEN 2	0.0260 inch	
SPECIMEN 3	0.0233 inch	
SPECIMEN 4	0.0237 inch	
SPECIMEN 5	0.0237 inch	
		-

AVERAGE TOTAL THICKNESS	0.0244 Inch	24.4 mil

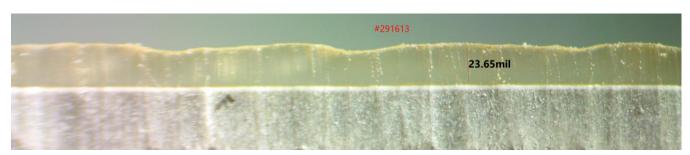

APPROVED BY:

Lang asliny

This report is provided for the exclusive use of the client to whom it is addressed. It may be used in its entirety to gain product acceptance from duly constituted authorities. This report applies only to those samples tested and is not necessarily indicative of apparently identical of similar products. This report, or the name of Professional Testing Laboratory Inc. shall not be used under any circumstance in advertising to the general public.

714 Glernwood Place Dalton, GA 30721 Phone: 706-226-3283 Fax: 706-226-6787 email: protest@optilink.us