



# Natural Essence **PLUS**

SPC COLLECTION



LI-NE209 Palisade

Natural Essence Plus offers rich, distinct colors and textures with the latest registered embossing technology, featuring intricate hardwood aesthetics and the authentic finishing touch of natural wood. A highly-durable 20 mil wear layer and new virgin white underlayment offers the latest in durability and functionality with regal style. Made from 100% ecological ingredients, Natural Essence Plus represents both luxury and supreme craftsmanship with the highest environmentally friendly standards.



Waterproof



Indent Resistant



Sound Tested



Pet Friendly



Formaldehyde Free



Phthalate Free

## SPECIFICATIONS

Material Type	SPC	Pad Type	Antibacterial + Acoustic	Per Box	6 pieces	22.88 sq.ft.	50 lbs.
Plank Size	5' x 9"	Edge Profile	Painted Bevel	Pallet	52 boxes	1,189.52 sq.ft.	2,650 lbs.
Total Thickness	6.5 mm	Installation Type	Floating	Container	936 boxes	21,411 sq.ft.	
Core Thickness	5 mm	Click System	Uniclic				
Wear Layer	20 mil	Plank Repeat	5				
Attached Pad	Yes	Texture/Style	Embossed in Register				
Pad Thickness	1.5 mm	Finish	UV Acrylic				



CERTIFIED BY SCS Global Services


## COLORS




LI-NE201 Sequoia



LI-NE202 Kumo

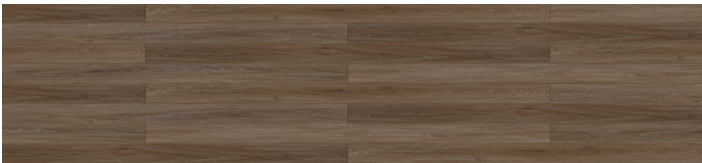

LI-NE205 Foresta

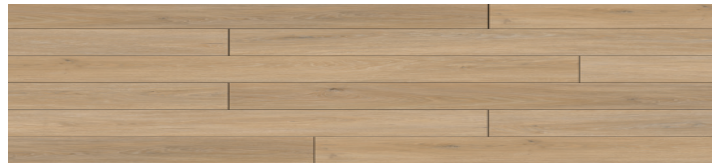

LI-NE207 Evergreen



LI-NE208 Tresor



LI-NE209 Palisade



LI-NE211 Azur



LI-NE212 Medieval

## MOULDINGS



End Cap



Flush Stair Nose



Quarter Round



Reducer



T-Moulding

## TESTING

ASTM E648	Fire Rating	Class 1	ASTM F410	Average Wear Layer Thickness	23.2 mil
ASTM D2047	Coefficient of Friction	Standard Neolite 1.02	ASTM F2199	Dimensional Stability, Curl After Heat	Passes
ASTM F970	Static Load Limit	0.003 in.	ASTM F1914	ASTM F2199	Passes
E492	IIC - Impact Sound Rating	59 db	ASTM F1514	Resistance to Heat	Passes
E90	STC - Sound Transmission Loss	53 db	ASTM F1514	Resistance to Light	Passes
ASTM F387	Overall Thickness	0.272 in.	Phthalate Free		Floor Score Certified