




END CAP

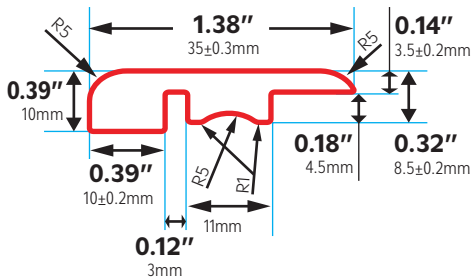


QUARTER ROUND

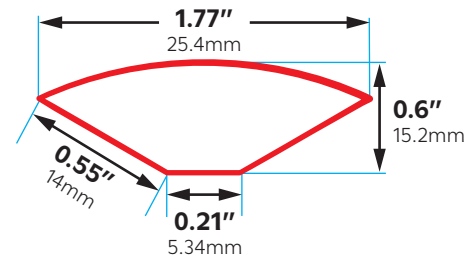


FLUSH STAIR NOSE

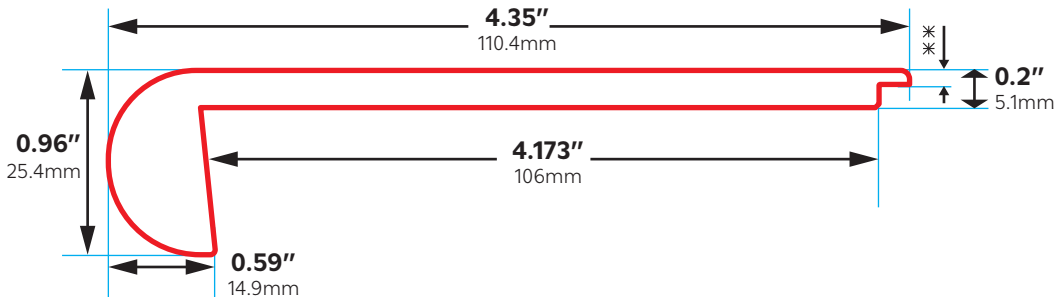


REDUCER

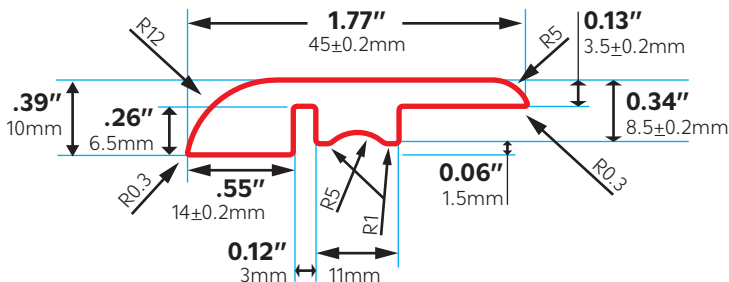


T-MOULDING

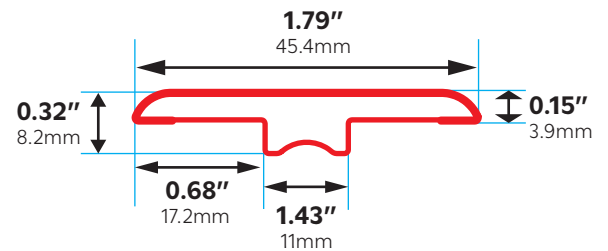


END CAP

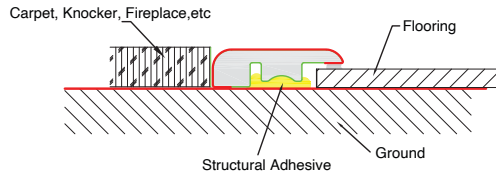


QUARTER ROUND

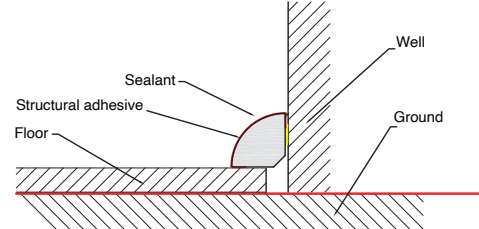


FLUSH STAIR NOSE

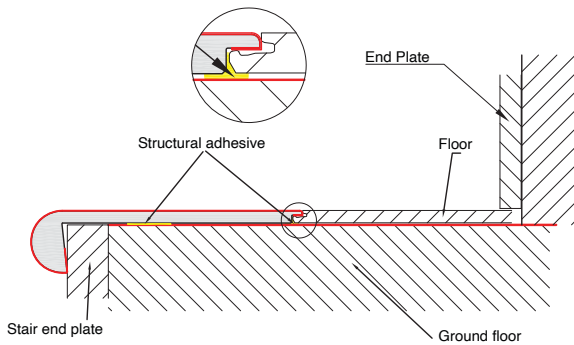


5mm Flush stair nose are suitable for 5mm floor, 7mm Flush stair nose are suitable for 7mm floor, the thickness of the floor and the thickness of the stairs at 0.5mm difference can be leveled by glue, when the thickness difference exceeds 0.5mm, you can use hard gasket leveling.

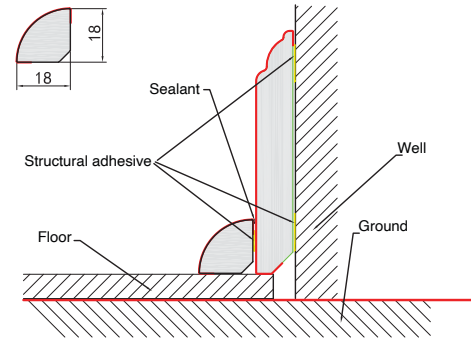



T-MOULDING

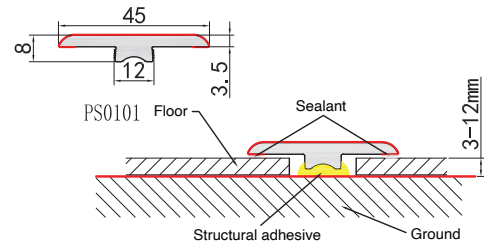

REDUCER

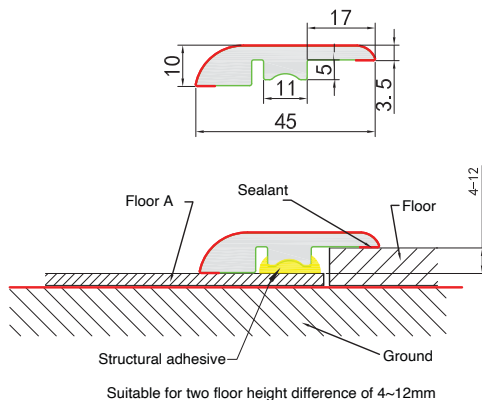

Suitable for two floor height difference of 4~12mm

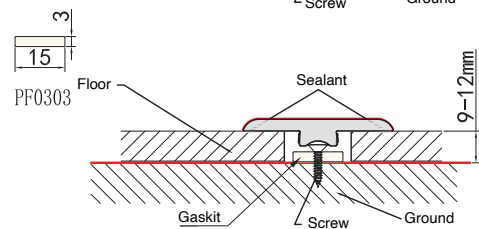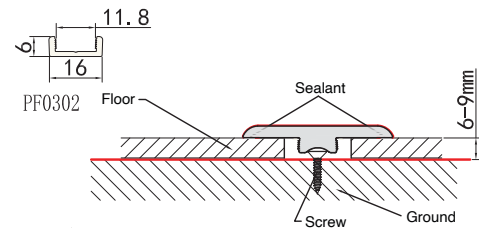

It can be installed by adhesive process or Utrack and gasket.